


EZAUX10

signalling switch AX 1 NO/NC standard - for Easypact

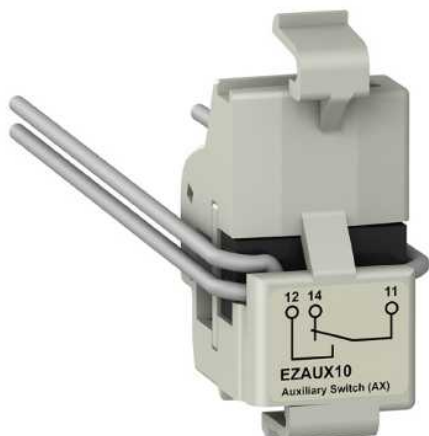

Main

Range of product	EZC100
Device short name	AX
Signal contacts composition	1 NO/NC

Complementary

Auxiliary contacts type	Standard
[I _{th}] conventional free air thermal current	5 A
[I _e] rated operational current	DC-14 : 3 A DC 24 V DC-14 : 1 A DC 48 V DC-14 : 0.4 A DC 125 V DC-14 : 0.2 A DC 250 V DC-12 : 4 A DC 24 V DC-12 : 2.5 A DC 48 V DC-12 : 0.4 A DC 125 V DC-12 : 0.2 A DC 250 V AC-15 : 5 A AC 50/60 Hz 48 V AC-15 : 5 A AC 50/60 Hz 24 V AC-15 : 3 A AC 50/60 Hz 125 V AC-15 : 2 A AC 50/60 Hz 250 V AC-12 : 5 A AC 50/60 Hz 48 V AC-12 : 5 A AC 50/60 Hz 24 V AC-12 : 5 A AC 50/60 Hz 125 V AC-12 : 3 A AC 50/60 Hz 250 V
Minimum load	10 mA at 24 V
Auxiliary connection terminal	Lead wire

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.